


# YJ Planar Fast Recovery Diode Die Specification

400V 8A, Fast recovery diode die based on silicon planar process

Part No.: FRD08A400AS-290A

## Main Products Characteristics

- Average forward current:  $I_{F(AV)} = 8A$
- Maximum operating junction temperature:  $T_J = 150\text{ }^\circ\text{C}$
- Planar Construction
- Top metal: Al

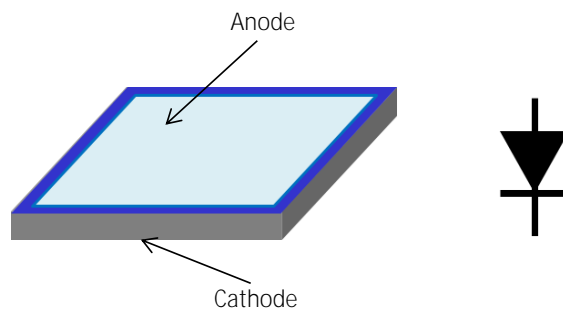

## Maximum Ratings

Parameter	Symbol	Rating
Repetitive peak reverse voltage	$V_{RRM}$	400V
Average forward current	$I_{F(AV)}$	8A
Non-repetitive peak surge current ( $t_p = 8.3\text{ ms}$ , halfwave, 1 cycle)	$I_{FSM}$	80A
Storage temperature range	$T_{stg}$	-40 to +150 °C
Maximum operating junction temperature	$T_J$	150 °C

## Static Electrical Characteristics ( $T_a = 25^\circ\text{C}$ )

Parameter	Symbol	Value	
		Spec	Typical
Reverse breakdown voltage $I_R = 50\mu\text{A}$	$V_{BR}$	420V	440V
Maximum forward voltage drop $I_F = 8A$ , Pulse Test: $t_p = 380\text{ }\mu\text{s}$ , $\delta \leq 2\%$	$V_F$	1.25V	1.15V
Reverse Recovery Time $I_F = 0.5A$ , $I_R = 1A$ , $I_{rr} = 0.25A$	$T_{rr}$	35ns	28ns
Maximum reverse current $V_R = V_{RRM}$ Pulse Test: $t_p = 10\text{ ms}$ , $\delta \leq 2\%$	$I_R$	2uA	0.02uA

## Device Schematics and Outline Drawing

Die Thickness	290um
Die Size *	1900x1900um
Top Metal Pad	1170x1170um
Active Area	1112x1112um
Top Metal	Al
Back Metal	Ag

Note: 1 \*: Cutting street width is around 40um

## Important Notice

<p>Specification apply to die only. Actual performance may degrade when assembled.</p> <p><b>Yangjie Electronics</b> does not guarantee device performance after assembly. All operating parameters must be validated for each customer application by customer's technical experts.</p> <p>Data sheet information is subjected to change without notice.</p>	<p>Recommended Storage Environment:</p> <p>Store in original container, in dessicated nitrogen, with no contamination.</p> <p>Shelf life for parts stored in above condition is 2 years.</p> <p>If the storage is done in normal atmosphere shelf life is reduced to 6 months.</p>
---	--