


# YJ Planar Fast Recovery Diode Die Specification

600V 30A, Fast recovery diode die based on silicon planar process  
Part No.: FRD30A600AS-290M

## Main Products Characteristics

- Average forward current:  $I_{F(AV)} = 30A$
- Maximum operating junction temperature:  $T_j = 150\text{ }^\circ\text{C}$
- Planar Construction
- Top metal: Al

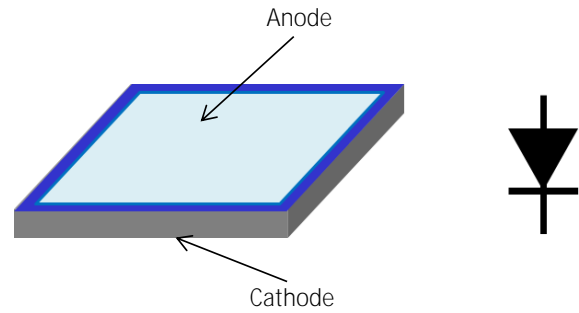

## Maximum Ratings

Parameter	Symbol	Rating
Repetitive peak reverse voltage	$V_{RRM}$	600V
Average forward current	$I_{F(AV)}$	30A
Non-repetitive peak surge current ( $t_p = 8.3\text{ ms}$ , halfwave, 1 cycle)	$I_{FSM}$	300A
Storage temperature range	$T_{stg}$	-40 to +150 $^\circ\text{C}$
Maximum operating junction temperature	$T_j$	150 $^\circ\text{C}$

## Static Electrical Characteristics ( $T_a = 25^\circ\text{C}$ )

Parameter	Symbol	Value	
		Spec	Typical
Reverse breakdown voltage $I_R = 50\mu\text{A}$	$V_{BR}$	630V	680V
Maximum forward voltage drop $I_F = 20A$ , Pulse Test: $t_p = 380\text{ }\mu\text{s}$ , $\delta \leq 2\%$	$V_F$	1.45V	1.25V
Reverse Recovery Time $I_F = 0.5A$ , $I_R = 1A$ , $I_{rr} = 0.25A$	$T_{rr}$	50ns	40ns
Maximum reverse current $V_R = V_{RRM}$ Pulse Test: $t_p = 10\text{ ms}$ , $\delta \leq 2\%$	$I_R$	2 $\mu\text{A}$	0.05 $\mu\text{A}$

## Device Schematics and Outline Drawing

Die Thickness	290 $\mu\text{m}$
Die Size *	3300 $\mu\text{m}$ X5200 $\mu\text{m}$
Top Metal Pad	2570 $\mu\text{m}$ X4470 $\mu\text{m}$
Active Area	2502 $\mu\text{m}$ X4402 $\mu\text{m}$
Top Metal	Al
Back Metal	Ag

Note: 1 \*: Cutting street width is around 40 $\mu\text{m}$

## Important Notice

<p>Specification apply to die only. Actual performance may degrade when assembled.</p> <p><b>Yangjie Electronics</b> does not guarantee device performance after assembly. All operating parameters must be validated for each customer application by customer's technical experts.</p> <p>Data sheet information is subjected to change without notice.</p>	<p>Recommended Storage Environment:</p> <p>Store in original container, in dessicated nitrogen, with no contamination.</p> <p>Shelf life for parts stored in above condition is 2 years.</p> <p>If the storage is done in normal atmosphere shelf life is reduced to 6 months.</p>
---	--